

10-26-00

PTO  
109/696358

10/25/00

Please type a plus sign (+) inside this box → ☐Approved for use through 09/30/2000. OMB 0651-0032  
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

UTILITY  
PATENT APPLICATION  
TRANSMITTAL

(Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))

Attorney Docket No.	33082
First Inventor or Application Identifier	Toshiyasu Kitamura
Title	KEYBUTTON ILLUMINATING DEVICE...
Express Mail Label No.	EL595431727US

## APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

1. ☒ \* Fee Transmittal Form (e.g., PTO/SB/17)  
(Submit an original and a duplicate for fee processing)
2. ☒ Specification [Total Pages 20]  
(preferred arrangement set forth below)
- Descriptive title of the invention
  - Cross References to Related Applications
  - Statement Regarding Fed sponsored R & D
  - Reference to Microfiche Appendix
  - Background of the invention
  - Brief Summary of the invention
  - Brief Description of the Drawings (if filed)
  - Detailed Description
  - Claim(s)
  - Abstract of the Disclosure
3. ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets 4]
4. Oath or Declaration [Total Pages 4]
- a. ☒ Newly executed (original or copy)
- b. ☐ Copy from a prior application (37 C.F.R. § 1.63(d))  
(for continuation/divisional with Box 16 completed)
- i. ☐ DELETION OF INVENTOR(S)  
Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).

\*NOTE FOR ITEMS 1 & 13: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT, IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).

## ADDRESS TO:

Assistant Commissioner for Patents  
Box Patent Application  
Washington, DC 20231

5. ☐ Microfiche Computer Program (Appendix)
6. Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)
- a. ☐ Computer Readable Copy
- b. ☐ Paper Copy (identical to computer copy)
- c. ☐ Statement verifying identity of above copies

## ACCOMPANYING APPLICATION PARTS

7. ☒ Assignment Papers (cover sheet & document(s))
8. ☐ 37 C.F.R. § 3.73(b) Statement (when there is an assignee) ☒ Power of Attorney
9. ☐ English Translation Document (if applicable)
10. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
11. ☐ Preliminary Amendment
12. ☒ Return Receipt Postcard (MPEP 503)  
(Should be specifically itemized)
13. ☐ \* Small Entity Statement filed in prior application, Status still proper and desired (PTO/SB/09-12)
14. ☒ Certified Copy of Priority Document(s) (if foreign priority is claimed)
15. ☒ Other: Check for \$1,100.00

16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP)

of prior application No: \_\_\_\_\_

Prior application information: Examiner \_\_\_\_\_

Group / Art Unit: \_\_\_\_\_

For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

## 17. CORRESPONDENCE ADDRESS

☒ Customer Number or Bar Code Label

000,116

or ☐

Correspondence address below

(Insert Customer No. or Attach bar code label here)

Name	Michael W. Garvey				
	Pearne & Gordon LLP				
Address	526 Superior Avenue East				
	Suite 1200				
City	Cleveland	State	Ohio	Zip Code	44114-1484
Country	U.S.A.	Telephone	216-579-1700	Fax	216-579-6073

Name (Print/Type)	Michael W. Garvey	Registration No. (Attorney/Agent)	35878
Signature		Date	10/25/00

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

**PATENT**

**PEARNE & GORDON LLP**  
526 Superior Ave., East, Suite 1200  
Cleveland Ohio 44114-1484  
(216) 579-1700

Attorney Docket No. 33082

Assistant Commissioner for Patents  
Box PATENT APPLICATION  
Washington, D.C. 20231

Sir/Madam:

Transmitted herewith for filing by other than a small entity is the patent application of:

Inventor: Toshiyasu Kitamura, Kazuhiro Konishi, Taichi Tabata,  
Kouichi Yamamoto

For: KEYBUTTON ILLUMINATING DEVICE AND WIRELESS  
COMMUNICATION TERMINAL APPARATUS EQUIPPED  
WITH THE SAME

4 sheets of formal drawings are included.

An assignment of the invention to Matsushita Electric Industrial Co., Ltd., is included along with a Recordation Form Cover Sheet. Please record and return the assignment to the undersigned.

Priority is claimed under 35 U.S.C. §119 on the basis of the following foreign applications:

Japanese Patent Application No. 11-304597, Filed October 26, 1999.

A certified copy of this application is enclosed.


"Express Mail" mailing label number EL595431727US

Date of Deposit 10/25/00

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 C.F.R. § 1.10 on the date indicated above and is addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231.

Janet Morrison

Printed Name of Person Mailing Paper or Fee



Signature of Person Mailing Paper or Fee

**CLAIMS AS FILED**

For	Number	Rate	Fees	
Total claims in excess of 20:	0	×	\$18.00	\$0.00
Independent claims in excess of 3:	1	×	\$80.00	\$80.00
Multiple dependent claims, if any, add surcharge of \$270.00:				\$270.00
Non English Specification, add surcharge of \$130.00:				\$0.00
		Basic Fee		\$710.00
		TOTAL FILING FEE		\$1,060.00
Assignment Recordal Fee of \$40.00				\$40.00
		TOTAL FEE		\$1,100.00

A check in the amount of the Total Fee calculated above is enclosed.

The Commissioner is hereby authorized to charge any fees under 37 C.F.R. §§1.16 and 1.17 which may be required during the entire pendency of this application, or to credit any overpayment, to Deposit Account No. 16-0820, Order No. 33082.

Respectfully,

PEARNE & GORDON LLP

  
\_\_\_\_\_  
Michael W. Garvey, Reg. No. 35878

Date: 25 OCT 00

**KEYBUTTON ILLUMINATING DEVICE AND  
WIRELESS COMMUNICATION TERMINAL APPARATUS EQUIPPED WITH THE SAME**

BACKGROUND OF THE INVENTION

5           The present invention relates to a keybutton illuminating device for a wireless communication terminal apparatus, such as a portable cellular telephone apparatus, which comprises high-frequency electronic parts and a shielding case and to a wireless communication terminal apparatus that is equipped with  
10 a keybutton illuminating device, and which has a specific configuration that can improve the luminous efficiency through reflecting the light beams emitted from the light emitting element against the shielding case wall.

          Many of conventional wireless communication terminal equipments, such as a portable cellular telephone apparatus,  
15 illuminates ten-key part with light of light emitting elements during operations and at incoming call. As for conventional keybutton illumination methods, the adopted methods are either a use of special parts for concentration of light from the light  
20 emitting element that is mounted on the printed circuit board or reflection and propagation of the light beams with a reflective sheet.

          However, elimination of extra space inside an apparatus along with progress in down-sizing and weight reduction of the  
25 apparatus main body, the use of the special parts and the reflective sheet has become difficult against the design policy of parts

count reduction for advancement of weight reduction.

Although there has been no case of illuminable keybutton disposed at a part covered with a shielding case since it is explicit that light cannot come out of the shielding case even  
5 a light emitting element may be provided on the printed circuit board, there has been a new recent demand for use of the illuminable keybuttons disposed at the part covered with the shielding case for increase of functions.

#### SUMMARY OF THE INVENTION

10 This invention is primarily purposed to provide a keybutton illuminating device that can increase the luminous efficiency through forming of a hole part at a certain part in the shielding case, disposing of a keybutton in such a hole part and reflecting the light beams emitted from a light emitting element that is  
15 disposed under the key button against the shielding case wall, as well as to solve the space problem along with progress in reduction of the size and weight of the above described apparatus main body and is secondarily purposed to provide a wireless communication terminal apparatus that enables a prescribed display  
20 through mounting of the above-described keybutton illuminating apparatus.

According to the first aspect of the invention, a keybutton illuminating device for a keybutton structure comprises a casing, a shielding case that is provided with metal-type surface treatment,  
25 a keybutton and a printed circuit board that is mounted with a light emitting element, in that the light emitting element

is surrounded entirely by a rib that is disposed upright on the shielding case. This configuration enables solving of the space problem as well as improvement in the luminous efficiency.

According to the second aspect of the invention, a keybutton illuminating device for a keybutton structure comprises a casing, a shielding case that is provided with metal-type surface treatment, a keybutton and a printed circuit board that is mounted with a light emitting element, in that the light emitting element is surrounded entirely by a rib that is provided upright on the shielding case in such manner that a surface that contacts the printed circuit board contacts in a full and tight adherence. This configuration enables solving of the space problem as well as further improvement in the luminous efficiency.

Preferably, a rib that is provided upright on the shield is so constructed as to surround the light emitting element in an approximately oval shape. This configuration enables an improvement in the luminous efficiency.

According to third aspect of the invention, a keybutton illuminating device, wherein a keybutton for switch actions of contact patterns that are print-wired on both sides of a light emitting element that is mounted on a printed circuit board is operated by pressing of a contact member that is disposed on this keybutton, in that a shielding case for holding of a skirt part of the keybutton is disposed upright on the printed circuit board in such manner as to surround the light emitting element and the contact patterns and by that wall of the shielding case

reflects light beams that are emitted from the light emitting element. This configuration enables solving of the space problem and improvement in the luminous efficiency.

Preferably, a wall that reflects light beams from a light emitting element of the shielding case is plated for a mirror finish. This configuration enables an improvement in the luminous efficiency

According to the fourth aspect of the invention, a wireless communication terminal apparatus that is equipped with a keybutton illuminating device for a keybutton structure that is composed of a casing, a shielding case that is provided with metal-type surface treatment, a keybutton and a printed circuit board that is mounted with a light emitting element, in that the light emitting element is surrounded entirely by a rib that is disposed upright on the shielding case. This configuration enables solving of the space problem and providing of the wireless communication terminal apparatus that is equipped with the keybutton illuminating device of a further improved luminous efficiency.

Preferably, the keybutton may be operated when there is a need for a voice memo operation for recording of the contents of a present vocal communication, wherein the light emitting element comes to illuminate or blink on start of the voice memo operation. This configuration enables notification of the start of the voice memo operation with illumination or blink of the light emitting element.

Furthermore, the keybutton may remain illuminating or

blinking during communication. This configuration enables notification of the active state of communication with the illumination or blink of the light emitting element.

Still further, the keybutton remains illuminating or  
5 blinking during communication but, on start of voice memo operation for recording of the present vocal communication by depression thereof, starts illuminating or blinking in a manner different from the illuminating or blinking manner during the communication.

This configuration enables notification of the two active states  
10 of communication and voice memo recording respectively with a single keybutton.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1A is an external perspective view of a portable cellular telephone apparatus that is related to an embodiment  
15 of the invention;

Figure 1B is an external perspective view of the portable cellular telephone apparatus that is related to the embodiment of the invention;

Figure 1C is a sectional view of the portable cellular  
20 telephone apparatus related to the embodiment of the invention;

Figure 2 is a block diagram of the portable cellular telephone apparatus that is related to the embodiment of the invention;

Figures 3A to 3C are sectional views in the vicinity  
25 of the voice memo recording key button of the embodiment of the invention; and



Figure 4 is a flowchart of the portable cellular telephone that relates to the embodiment of the invention.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

As for the embodiments of the invention, the entire  
5 configuration of the wireless communication terminal equipment where the keybutton illuminating device of the invention is mounted is described hereafter with references to Figures 1 through 3 and the configuration of the keybutton illuminating device of the invention is described in detail with references to Figure  
10 4 as follows.

Figure 1A is an external perspective view of a portable cellular telephone apparatus as a wireless communication terminal apparatus that is related to an embodiment of the invention, with an operation side up, wherein a telephone receiver part  
15 2, a telephone transmitter part 3, a key operation part 4, a display part 5 and an antenna part 6 are disposed on a main body case 1.

Figure 1B is an external perspective view of the wireless communication terminal apparatus that is related to the embodiment  
20 of the invention, with the back side up, wherein a voice memo recording keybutton 7 for start of recording the contents of present vocal communication by depression thereof is disposed in the vicinity of the antenna part 6 of the main body case 1.

Figure 1C is a sectional view of the wireless communication  
25 terminal apparatus related to the embodiment of the invention, wherein a printed circuit board 8 is provided inside the main

body case 1 and wherein a wireless communication circuit part 9 for wireless communication is disposed on the printed circuit board 8 in the vicinity of an antenna part 6. The wireless communication circuit part 9 that has components generates high frequency is covered with a shielding case 10 as a countermeasure against unnecessary radiation. A plastic shielding case 10 that is vapor-deposited with some metal is used in recent portable cellular telephone apparatus for the purpose of weight reduction.

The voice memo recording keybutton 7 is disposed in a hole part 11 that is surrounded by the shielding case 10 on the printed circuit board 8. A light emitting element 22, such as an LED, is disposed on the printed circuit board 8.

Figure 2 is a block diagram of the portable cellular telephone apparatus that is related to the embodiment of the invention shown in Figure 1. As shown in Figure 2, the electric wave that is received at the antenna part 6 is transmitted to a signal receiving part (not shown in the figure) of the wireless communication circuit part 9, and the received information is transmitted to a control part 12. The control part 12 displays some received information, such as received telephone number, on a display part 5, such as a liquid crystal display device.

The control part 12 converts the received information into vocal information and outputs the vocal sounds at the telephone receiver part 2 (a speaker). On reception of user's voice, the telephone transmitter part 3 (a microphone) transmits this to the control part 12, and then a signal transmitter part (not shown in the

figure) of the wireless communication circuit part 9 and the antenna 6 transmit it wirelessly to the other party of the wireless communication.

When the voice memo recording keybutton 7 is operated,  
5 the control part 12 stores vocal information, such as the contents of the present vocal communication, in a memory 13 or reads stored information. The voice memo recording keybutton 7 operates in two functions: one is a voice memo recording switch 15 for start of recording the contents of the conversation when depressed,  
10 and the other is a communication state indicator 16 that indicates presence of communication with illumination of the light emitting element 22 as controlled by the control part 12.

The key operation part 14, such as ten keys, inputs the signal to control part 12 and stores private information, such  
15 electronic telephone directory, in the memory 13 via the control part 12 through operations of the keys.

Figure 3 is a sectional view that shows the structure in the vicinity of the voice memo recording keybutton 7 that is the keybutton illuminating device that relates to the embodiment  
20 of the above-mentioned invention.

As shown in Figure 3, the keybutton illuminating device is composed of the voice memo recording keybutton 7 that is supported at such parts as a skirt part 19 by a casing 18 of the main body case 1 and that comprises a contact part having the electro  
25 conductive film 17 that comes into contact with the electro conductive pattern 20 that is disposed on the printed circuit

board 8 when depressed, the shielding case 10 that supports the skirt part 19 of the voice memo recording keybutton 7, that is provided with a metal surface treatment for shielding of the components mounted on the printed circuit board 8, that has a hole part 11 that surrounds the electro conductive pattern 20, that has a rib 21 for functioning as a wall of the hole part 11, and that is supported by the printed circuit board 8, and the light emitting element 22, such as the LED, that is soldered onto the printed circuit board and that is illuminated while the communication is active.

Each of bosses 23 for positioning is so formed as to protrude at the bottom of the rib 21 of the hole part 11 of the shielding case 10 and to fit in a positioning hole 24 in the printed circuit board 8 so that a relative positioning of the light emitting element 22 and the hole part 11 of the shielding case 10 can be achieved accurately.

The wall on the light emitting element side of the shielding case 10 is provided with plating (mirror finish) 25. In addition, the shielding case 10 is suppressed by the casing 18 of the main-body-case body 1 so as to contact tightly to the printed circuit board 8 via the skirt part 19 of the keybutton for further improvement in the luminous efficiency.

Figure 3B shows a configuration of the illuminating part that is surrounded fully by the rib 21 except the voice memo recording keybutton 7 that is shown in Figure 3A. Figure 3B, wherein the rib 21 has an approximately oval shape, shows how

the light beams that are emitted from the light emitting element 22, such as the LED, are reflected against the wall. The electro-conductive pattern 20 that is disposed on the printed circuit board 8 has such a configuration wherein the

5 electro-conductive part is laid out like comb teeth for the purpose of reduction in the size and weight of the main body of the equipment, and the switch function as the keybutton is accomplished by being pushed against the contact point part that has the electro-conductive film 17 shown in Figure 3A.

10 In the sectional view of Figure 3A, when the voice memo recording keybutton 7 is pushed downward, the part in contact with the skirt part 19 is deformed and falls downward so that the electro-conductive film 17 comes into contact with the electro-conductive pattern 20 on the printed circuit board 8.

15 Then, the LED 22 illuminates or blinks with an illuminating circuit that is not shown in the figure while the voice memo recording keybutton 7 is illuminated.

Figure 3C is a sectional view in the direction of Arrow A in Figure 3B, which shows a state wherein the voice memo recording

20 keybutton 7 ascends with the force of the skirt part 19 after the voice memo recording keybutton 7 is depressed and returns to the position to contact the casing 18 of the main body case 1, and wherein the illuminated LED 22 continues to illuminates the voice memo recording keybutton 7. As described in the

25 explanation on Figure 2, it is also possible for the control part 12 to illuminate or blink the LED 22 during communication

for the purpose of notification of the communication state with illumination of the voice memo recording keybutton 7 in a state such as in Figure 3C.

Figure 4 is a flowchart that shows the operation of the communication state display while the communication is active and the operation when the voice memo is recorded on the way of the communication in the embodiment of the invention. First of all, when the power switch is turned on, the portable cellular telephone apparatus goes into a reception stand-by state (step 1) and starts ringing for notification of arrival of an in-coming call (step 2); when the user presses a communication button (step 3), the wireless communication starts (step 4). On start of the wireless communication, the control part 12 blinks the LED 22 as the communication state indicator 16 in a first illuminating color, for example, blue (step 5). Termination of the communication in this state recovers the reception stand-by state (step 6).

When the voice memo recording keybutton 7 that is the voice memo recording switch is pushed during communication (step 7), the LED 22 of the voice memo recording keybutton 7 blinks in the second illuminating color, for example, in red (step 8).

On completion of the voice memo recording after expiration of a predetermined duration of time, or on completion of the voice memo recording by pressing the voice memo recording keybutton 7 again to finish the voice memo recording (step 9), the LED 22 blinks in the first illuminating color of blue as the

communication state indicator 16 (step 10). Finally, the reception stand-by state resumes on completion of the communication (step 11).

The above-described operations enable to notify the people  
5 around the user of the fact that the use is in the active state of communication with blink or illumination of the voice memo recording keybutton 7 that is provided on the back surface of the main-body-case body as the communication state indicator 16 or to confirm the active state of the voice memo recording  
10 of the contents of the present vocal communication with blink or illumination when the voice memo recording keybutton 7 is depressed to function this as the voice memo recording switch 15.

As mentioned above, the configuration wherein the  
15 shielding case is provided with the hole part so as to dispose the light emitting element on the printed circuit board at such hole part and to disposed the keybutton on the light emitting element positions shielding case enables use of the inner wall of the hole part of the shielding case as reflective surface  
20 of the light from the light emitting element, since the shielding case is so accurately positioned against the printed circuit board that the relative positional relationship between the light emitting element on the printed circuit board and the shielding case is maintained accurately, and since the property of the  
25 shielding case surface that is provided with the metal-type surface treatment, making it possible to bright illumination of the

keybutton through enhancement of the luminous efficiency without addition of a reflective mirror or reflective sheet for exclusive use.

Although the voice memo recording keybutton 7 is disposed  
5 in the vicinity of the antenna 6 on the back side of the main body case 1 is described for the embodiment above, a keybutton illuminating device that is similar to the embodiment of the invention can be provided on the part that is covered with the shielding case, on the front side of the main body case body  
10 1, besides the back side of the main body case 1 in a casing wherein the shielding case is used at the ten-key part on the front side of the main body case 1.

The first aspect of the invention of the description is the keybutton illuminating device for the keybutton structure  
15 that is composed of the casing, the shielding case that is provided with metal-type surface treatment, a keybutton and the printed circuit board that is mounted with a light emitting element, in that the light emitting element is surrounded entirely by the rib that is disposed upright on the shielding case. This  
20 configuration is effective in solving of the space problem as well as improvement in the luminous efficiency.

The second aspect of the invention is the keybutton illuminating device for the keybutton structure that is composed of the casing, the shielding case that is provided with metal-type  
25 surface treatment, a keybutton and the printed circuit board that is mounted with a light emitting element, in that the light



emitting element is surrounded entirely by the rib that is provided upright on the shielding case in such manner that the surface that contacts the printed circuit board contacts in the full and tight adherence. This configuration is effective in solving  
5 of the space problem as well as further improvement in the luminous efficiency.

Further, in the keybutton illuminating device, the rib that is provided upright on the shield may be constructed as to surround the light emitting element in an approximately oval  
10 shape. This configuration is effective in an improvement in the luminous efficiency.

The third aspect of the invention is the keybutton illuminating device, wherein the keybutton for switch actions of contact patterns that are print-wired on both sides of the  
15 light emitting element that is mounted on the printed circuit board is operated by pressing of the contact member that is disposed on this keybutton, in that the shielding case for holding of the skirt part of the keybutton is disposed upright on the printed circuit board in such manner as to surround the light emitting  
20 element and the contact patterns and by that wall of the shielding case reflects light beams that are emitted from the light emitting element. This configuration is effective in solving of the space problem and improvement in the luminous efficiency.

Furthre, in the keybutton illuminating device, the wall  
25 that reflects light beams from the light emitting element of the shielding case is plated for the mirror finish. This

configuration is effective in an improvement in the luminous efficiency

The fourth aspect of the invention is the wireless communication terminal apparatus that is equipped with the keybutton illuminating device for the keybutton structure that is composed of the casing, the shielding case that is provided with metal-type surface treatment, the keybutton and the printed circuit board that is mounted with the light emitting element, in that the light emitting element is surrounded entirely by the rib that is disposed upright on the shielding case. This configuration is effective in solving of the space problem and providing of the wireless communication terminal apparatus that is equipped with the keybutton illuminating device of the further improved luminous efficiency.

Further, in the wireless communication terminal apparatus the keybutton is operated when there is the need for the voice memo operation for recording of the contents of the present vocal communication, wherein the light emitting element comes to illuminate or blink on start of the voice memo operation. This configuration is effective in notification of the start of the voice memo operation with illumination or blink of the light emitting element.

Further, in the wireless communication terminal apparatus, the keybutton remains illuminating or blinking during communication. This configuration is effective in notification of the active state of communication with the illumination or

blink of the light emitting element.

Furthermore, in the wireless communication terminal apparatus, the keybutton remains illuminating or blinking during communication but, on start of voice memo operation for recording  
5 of contents of the present vocal communication by depression thereof, starts illuminating or blinking in the manner different from the illuminating or blinking manner during the communication.

This configuration is effective in notification of the two active states of communication and voice memo recording respectively  
10 with the single keybutton.

WHAT IS CLAIMED IS:

1. A keybutton illuminating device for a keybutton structure comprising:

a casing;

5 a shielding case that is provided with metal surface treatment;

a keybutton; and

a printed circuit board that is mounted with a light emitting element,

10 wherein said light emitting element is surrounded entirely by a rib that is disposed upright on said shielding case.

2. A keybutton illuminating device for a keybutton structure comprising:

15 a casing;

a shielding case that is provided with metal surface treatment;

a keybutton and a printed circuit board that is mounted with a light emitting element,

20 wherein said light emitting element is surrounded entirely by a rib that is provided upright on said shielding case in such manner that a surface that contacts said printed circuit board contacts in a full and tight adherence.

25 3. A keybutton illuminating device claimed in Claim 1 or Claim 2, wherein said rib that is provided upright on said

shield is so constructed as to surround said light emitting element in an approximately oval shape.

4. A keybutton illuminating device comprising:

5 a print circuit board;  
a light emitting element mounted on said print circuit board;

10 a keybutton for switch actions of contact patterns that are print-wired on both sides of said light emitting element is operated by pressing of a contact member that is disposed on this keybutton; and

15 a shielding case for holding of a skirt part of said keybutton is disposed upright on said printed circuit board in such manner as to surround said light emitting element and said contact patterns and by that wall of said shielding case reflects light beams that are emitted from said light emitting element.

20 5. A keybutton illuminating device claimed in Claim 4, wherein a wall that reflects light beams from a light emitting element of said shielding case is plated for a mirror finish.

25 6. A wireless communication terminal apparatus that is equipped with a keybutton illuminating device comprising:  
a casing;  
a shielding case that is provided with metal surface treatment;

a keybutton; and

a printed circuit board that is mounted with a light emitting element,

wherein said light emitting element is surrounded entirely  
5 by a rib that is disposed upright on said shielding case.

7. A wireless communication terminal apparatus claimed  
in Claim 6, wherein said keybutton is operated when there is  
a need for a voice memo operation for recording of the contents  
10 of present vocal communication, wherein said light emitting element  
comes to illuminate or blink on start of the voice memo operation.

8. A wireless communication terminal apparatus claimed  
in Claim 6, wherein said keybutton remains illuminating or blinking  
15 during communication.

9. A wireless communication terminal apparatus claimed  
in Claim 6, wherein said keybutton remains illuminating or blinking  
during communication but, on start of voice memo operation for  
20 recording of contents of present vocal communication by depression  
thereof, starts illuminating or blinking in a manner different  
from said illuminating or blinking manner during the communication.

## ABSTRACT OF DISCLOSURE

A keybutton structure that is composed of the casing 18, the shielding case 10 that is provided with metal-type surface treatment, the keybutton 7 and the printed circuit board 8 that is mounted with a light emitting element, in that the light emitting element 22, such as the LED, is surrounded entirely by the rib 21 that is disposed upright on the shielding case 10. This configuration enables solving of the space problem as well as improvement in the luminous efficiency.

10

FIG.1A

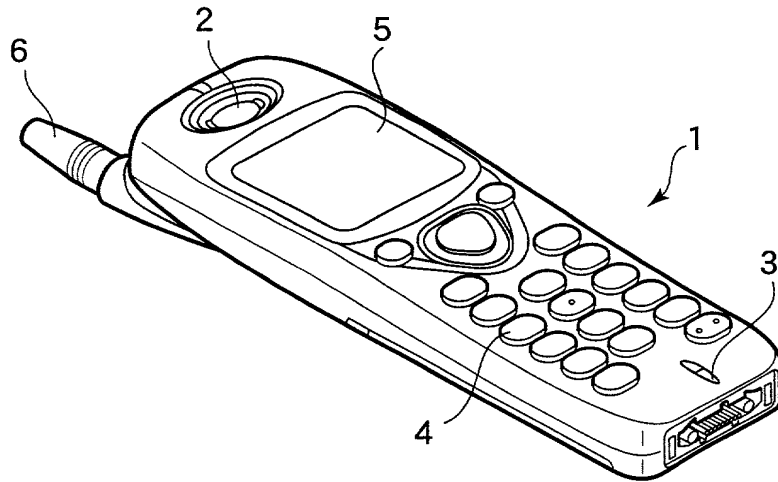


FIG.1B

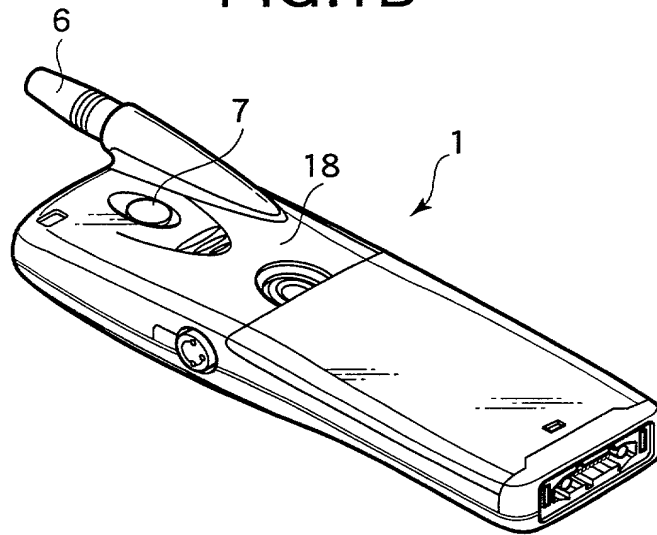


FIG.1C


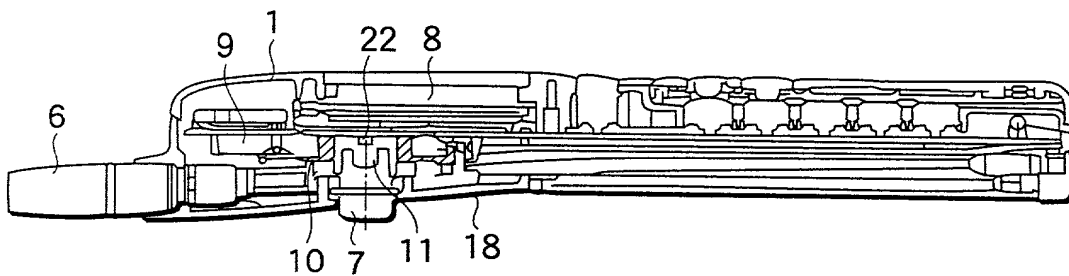




FIG.2

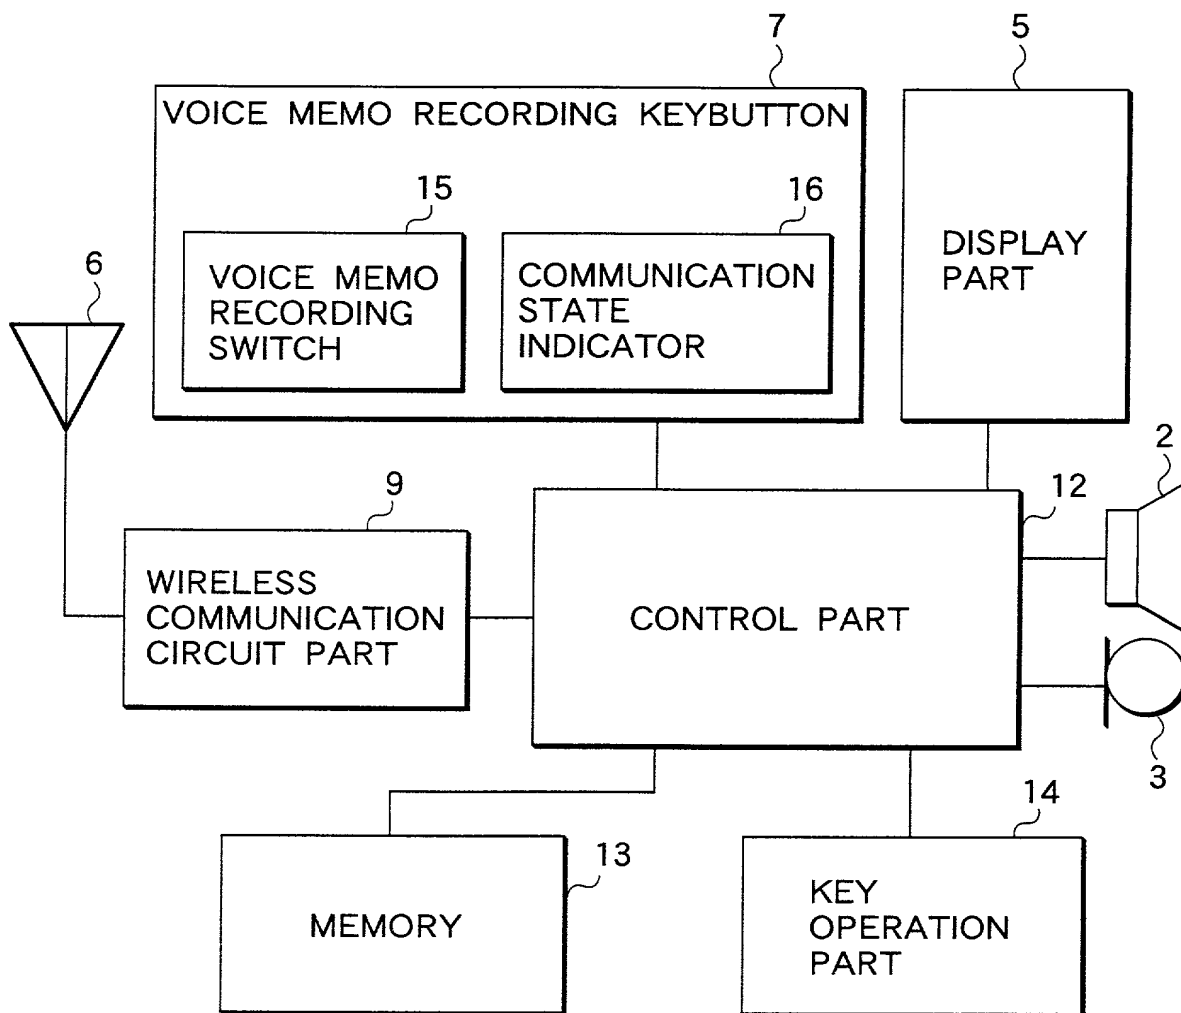

3/4

FIG.3A

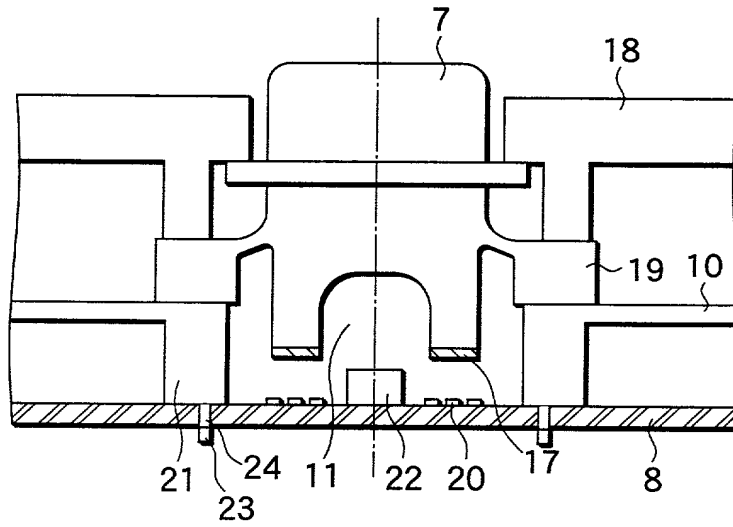


FIG.3B

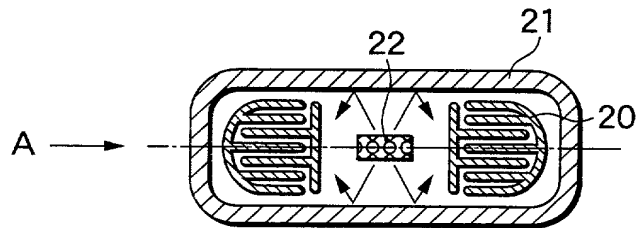


FIG.3C


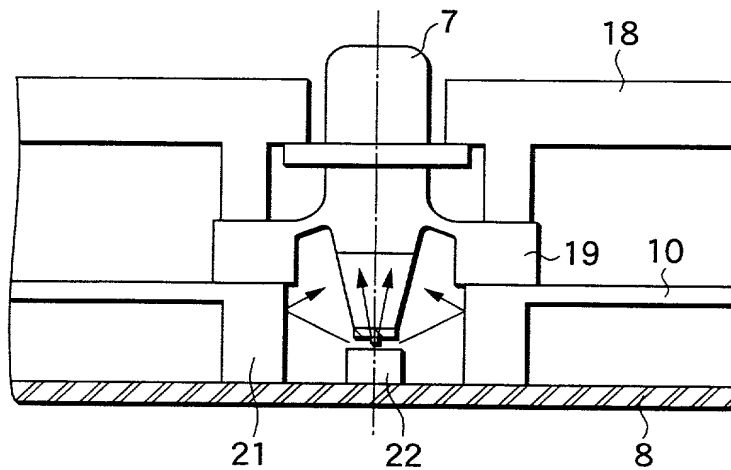


FIG.4

4/4

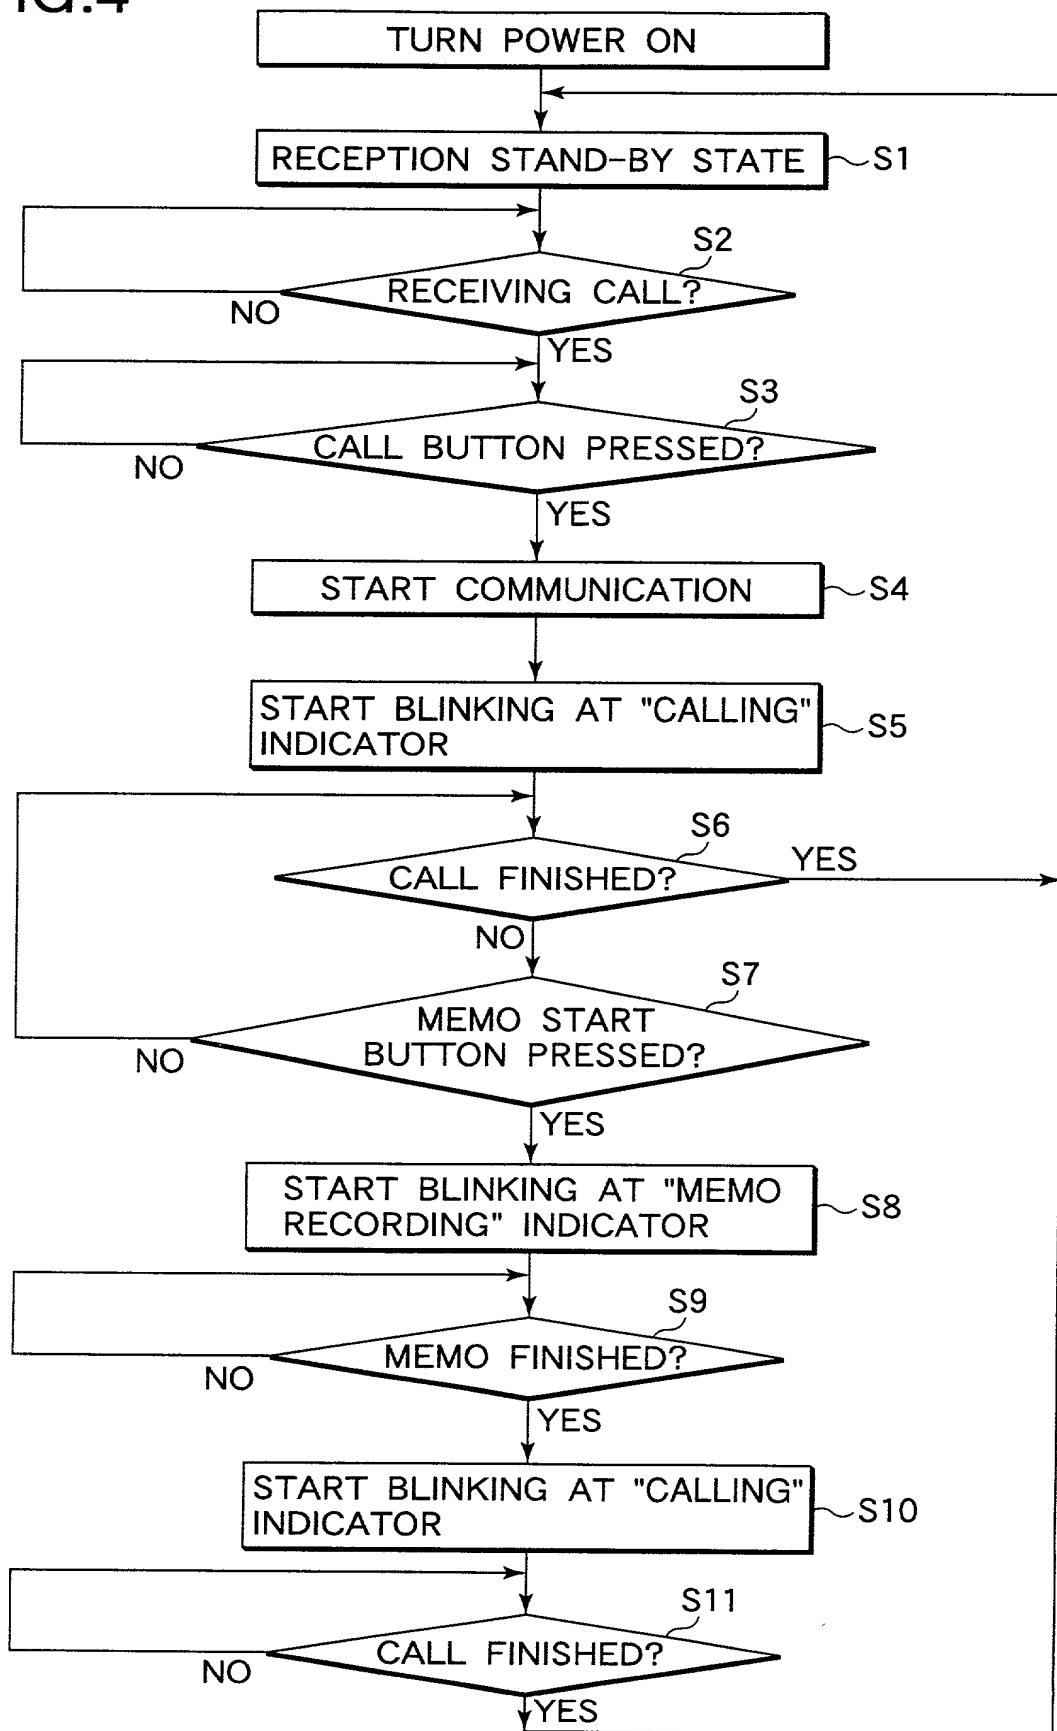

# DECLARATION AND POWER OF ATTORNEY FOR UTILITY OR DESIGN PATENT APPLICATION

☒ Submitted with Initial Filing

☐ Submitted after Initial Filing  
(Surcharge (37 CFR 1.16(e)) required)

Attorney Docket No.: 33082

Application Number: \_\_\_\_\_

First Named Inventor: Toshiyasu Kitamura

Filing Date: \_\_\_\_\_

Group Art Unit: \_\_\_\_\_

Examiner Name: \_\_\_\_\_

## As a below named inventor, I hereby declare that:

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

KEYBUTTON ILLUMINATING DEVICE AND WIRELESS COMMUNICATION  
TERMINAL APPARATUS EQUIPPED WITH THE SAME

the specification of which (check only one item below)

☒ is attached hereto,

OR

☐ was filed on \_\_\_\_\_ as United States Application Number or PCT  
International Application Number \_\_\_\_\_ and was amended on  
\_\_\_\_\_ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d), or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, any foreign application for patent or inventor's certificate, or any PCT international application having a filing date before that of the application on which priority is claimed.

<u>Country</u>	<u>Prior Foreign Application Number(s)</u>	<u>Foreign Filing Date (MM/DD/YYYY)</u>	<u>Priority Claimed?</u>
Japan	P. Hei. 11-304597	October/26/1999	Yes

I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional application(s) listed below.

<u>Provisional Application Number(s)</u>	<u>Filing Date (MM/DD/YYYY)</u>

I hereby claim the benefit under 35 U.S.C. 120, of any United States application(s), or 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of 35 U.S.C. 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

<u>U.S. Parent Application or PCT Parent Number</u>	<u>Parent Filing Date (MM/DD/YYYY)</u>	<u>Parent Patent Number (if applicable)</u>

As a named inventor, I hereby appoint each of the following as my attorneys with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

Charles B. Gordon, Reg. No. 16923  
Richard H. Dickinson, Jr., Reg. No. 18622  
Thomas P. Schiller, Reg. No. 20677  
David B. Deima, Reg. No. 22841  
Joseph J. Corso, Reg. No. 25845  
Howard G. Shimola, Reg. No. 26232

Jeffrey J. Sopko, Reg. No. 27676  
John P. Murtaugh, Reg. No. 34226  
James M. Moore, Reg. No. 32923  
David E. Spaw, Reg. No. 34732  
Michael W. Garvey, Reg. No. 35878  
Aaron A. Fishman, Reg. No. 44682

Address all correspondence to Customer Number 116.

Please direct all correspondence and inquiries to David E. Spaw at (216) 579-1700.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

(1) Inventor Name (sole or joint): Toshiyasu KITAMURA

Signature: Toshiyasu Kitamura

Date: October 20, 2000

Citizenship: Japan

Residence (City, State, Country): Kanagawa, Japan

Post Office Address: 204-1-102, Akiba-cho, Totsuka-ku,  
Yokohama-shi, Kanagawa, Japan

(2) Inventor Name (joint): Kazuhiro KONISHI

Signature: Kazuhiro Konishi

Date: October 20, 2000

Citizenship: Japan

Residence (City, State, Country): Shizuoka, Japan

Post Office Address: 91-303, Nakajuku, Kakegawa-shi, Shizuoka, Japan

(3) Inventor Name (joint): Taichi TABATA

Signature: Taichi Tabata

Date: October 20, 2000

Citizenship: Japan

Residence (City, State, Country): Kanagawa, Japan

Post Office Address: 1216-1-B102, Shinyoshida-cho, Kouhoku-ku,  
Yokohama-shi, Kanagawa, Japan

(4) Inventor Name (joint): Kouichi YAMAMOTO

Signature: Koichi Yamamoto

Date: October 20, 2000

Citizenship: Japan

Residence (City, State, Country): Kanagawa, Japan

Post Office Address: 1-16-4-201, Minowa-cho, Kouhoku-ku, Yokohama-shi,  
Kanagawa, Japan

(5) Inventor Name (joint):

Signature: \_\_\_\_\_

Date: \_\_\_\_\_

Citizenship: \_\_\_\_\_

Residence (City, State, Country): \_\_\_\_\_

Post Office Address: \_\_\_\_\_

(6) Inventor Name (joint):

Signature: \_\_\_\_\_

Date: \_\_\_\_\_

Citizenship: \_\_\_\_\_

Residence (City, State, Country): \_\_\_\_\_

Post Office Address: \_\_\_\_\_